




# EFD 130

## DRIFT ELIMINATOR

This drift eliminator panel is designed for counterflow applications. It is made of solvent-bonded sheets of self-extinguishing, thermoformed PVC.

The cells' unique design forces drift droplets to make **FOUR CHANGES IN DIRECTION**, and the drift eliminator boasts high mechanical strength as a result. Furthermore, the properties of the material used offer the highest level of protection against chemical degradation and weather exposure.

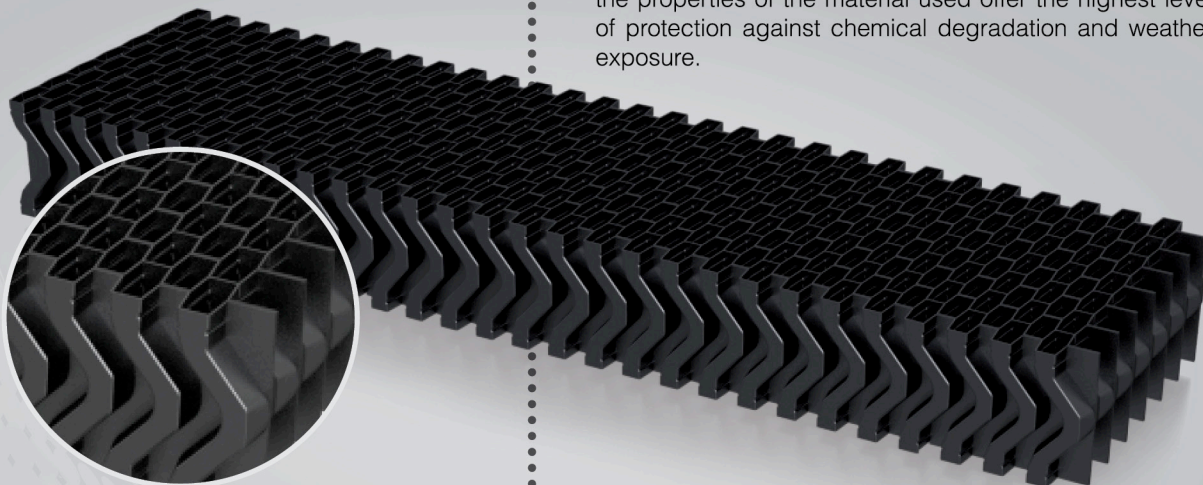

### Product Code

EFD 130  
Drift eliminator depth 130 mm

### Material

SELF-EXTINGUISHING PVC  
THAT MEETS ASTM STANDARD E-84  
AND CTI STANDARD 136

### Operating Temperatures

Standard  $-5^{\circ}$   $+60^{\circ}$   
High temperature  $-5^{\circ}$   $+75^{\circ}$   
Low temperature  $-40^{\circ}$   $+60^{\circ}$

### Size

Length: from 900 mm to 1200 mm  
Width: from 300 to 600 mm,  
in increments of 20 mm

*Can be cut to size without sacrificing structural integrity, including circular cuts*

### Thickness Before Forming

500 micron

### Main Features

- Self-extinguishing
- Lightweight and easy to move
- High mechanical strength
- Resistant to chemical degradation and biological attack
- Self-supporting structure
- High efficiency and low drift loss

### Applications

- Cooling towers
- Chemical scrubbers
- Paint booths

