




INLET LOUVERS 65

FILM FILL MEDIA FOR HEAT TRANSFER

The inlet louvers are made of solvent-bonded sheets of self-extinguishing, thermoformed PVC.

When used in cooling towers they prevent water droplets from leaving the unit and block the entrance of unwanted material. Inlet louvers play an essential role in reducing sound and in keeping sunlight out, thus inhibiting algae growth in the cooling system.

The unique design with TWO CHANGES IN DIRECTION offers a high mechanical strength and the properties of the material used offer the highest level of protection against chemical degradation and weather exposure.

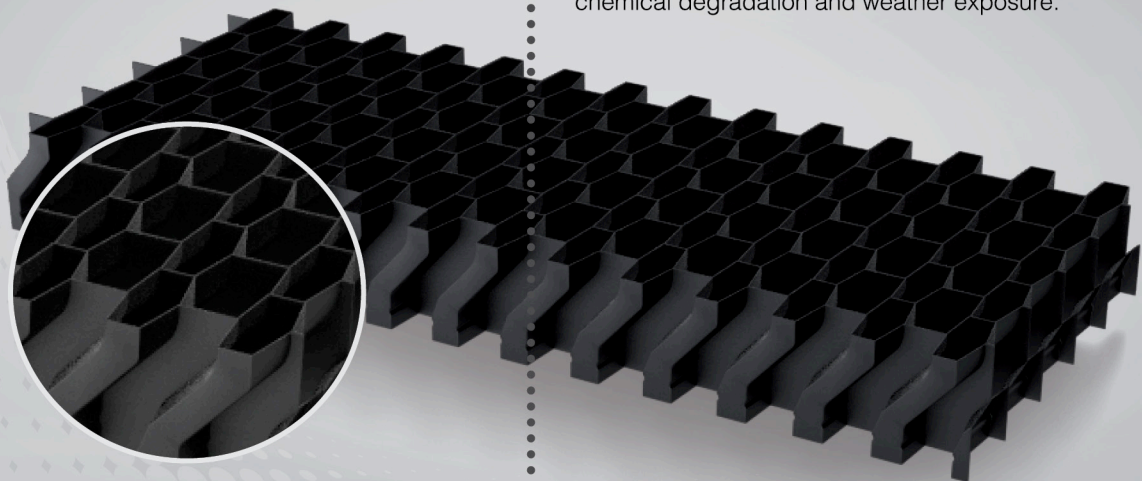

Product Code

CIL 25
Inlet Louvers depth 65 mm

Material

SELF-EXTINGUISHING PVC
THAT MEETS ASTM STANDARD E-84
AND CTI STANDARD 136

Operating Temperatures

Standard -5° +60°
High temperature -5° +75°
Low temperature -40° +60°

Size

Length: from 700 mm to 2400 mm
Width: from 300 to 600 mm,
in increments of 25 mm

*The product can be reinforced
by adding flat sheets*

Thickness Before Forming

500 microns

Main features

- Self-extinguishing
- Lightweight and easy to move
- High mechanical strength
- Resistant to chemical degradation and biological attack
- Keeps sunlight out
- Low pressure drops
- Maximized airflow

Applications

- Cooling towers
- Silencer systems